



Cat6A Unshielded Plenum

SKU: TS-PBC/6A-RD

23AWG • 4 Twisted Pairs • CMP • U/UTP
750MHz • Solid Bare Copper



Packaging Available

- 1000ft Reel

Jacket Colors



Key Features

- Bandwidth tested up to 750 MHz
- Suitable for 1 and 10-Gigabit Ethernet
- Easily Identified Color Striped Pairs
- Sequential Footage Markings Every 2ft
- In compliance with ANSI/TIA 568.2-D
- RoHS-3 compliant
- Supports PoE, PoE+, and PoE++ (IEEE 802.3af/at/bt) up to 60W & 300V DC

Print Legend

CAT6A 750MHz CMP PLENUM UTP 4-PAIR 23AWG EIA/TIA-568-C.2-1 0002FT-1000FT

Technical Data

Operating Temp. Range	75°C/167°F
Max. Operating Voltage	300v
Bend Radius	2in/5mm

Insulation	HDPE
Average Thickness	0.250
Min Point Thickness	0.230
Conductor Insulation Dia. (±0.01mm)	1.08
Twisted Pair Dia. (±0.02mm)	2.16
Spline	PE

Jacket	CMP-PVC
Average Thickness	0.55
Min. Point Thickness	0.50
Overall Diameter (±0.1mm)	6.20
Ripcord	Yes

Conductor	Solid Bare Copper
Size	23AWG
Conductor Dia. (±0.05mm)	0.58



Color of Pairs

Pair 1	Blue- White/Blue
Pair 2	Orange- White/Orange
Pair 3	Green- White/Green
Pair 4	Brown- White/Brown



Cable ID: 417 UTP4 CAT6A BC-TS

Test Limit: TIA Cat 6 Perm. Link

Limits Version: V7.6

Date / Time: 10/10/2021 12:53:35 PM

Operator: CHENGXIAOLAN

Headroom 3.9 dB (NEXT 3,6-4,5)

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Main: Versiv

S/N: 2034142

Software Version: V6.6 Build 2

Calibration Date: 12/23/2020

Adapter: DSX-8000 (DSX-PLA804)

S/N: 20475125

Remote: Versiv

S/N: 2035009

Software Version: V6.6 Build 2



Calibration Date: 12/23/2020

Adapter: DSX-8000R (DSX-PLA804)

S/N: 20485133


Test Summary: PASS

Length (ft), Limit 295	[Pair 4,5]	315
Prop. Delay (ns), Limit 498	[Pair 7,8]	487
Delay Skew (ns), Limit 44	[Pair 7,8]	18
Resistance (ohms)	[Pair 7,8]	14.24
Insertion Loss Margin (dB)	[Pair 7,8]	3.1
Frequency (MHz)	[Pair 7,8]	250.0
Limit (dB)	[Pair 7,8]	31.1

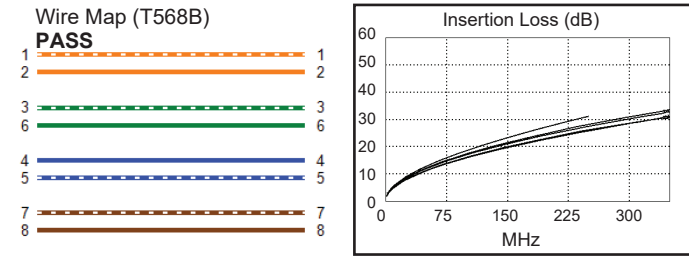


Worst Case Margin Worst Case Value


PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	1,2-4,5	3,6-4,5
NEXT (dB)	4.8	3.9	5.2	6.9
Freq. (MHz)	12.6	91.5	233.5	233.5
Limit (dB)	56.2	42.5	35.8	35.8
Worst Pair	1,2	3,6	1,2	3,6
PS NEXT (dB)	6.2	5.5	6.3	7.4
Freq. (MHz)	225.0	91.5	233.5	234.0
Limit (dB)	33.5	39.9	33.2	33.2

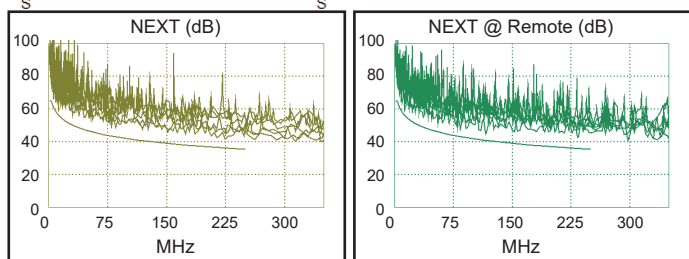


PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5-3,6	4,5-3,6	4,5-3,6	4,5-3,6
ACR-F (dB)	6.4	6.5	6.4	6.5
Freq. (MHz)	206.5	206.5	206.5	206.5
Limit (dB)	17.9	17.9	17.9	17.9
Worst Pair	3,6	3,6	3,6	3,6
PS ACR-F (dB)	8.4	8.5	8.4	8.5
Freq. (MHz)	206.5	206.5	206.5	206.5
Limit (dB)	14.9	14.9	14.9	14.9

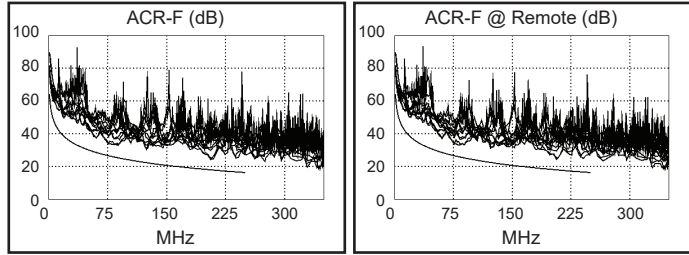

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	1,2-4,5	3,6-4,5
ACR-N (dB)	5.5	4.7	10.2	11.9
Freq. (MHz)	12.6	12.8	233.5	233.5
Limit (dB)	50.0	49.9	5.9	5.9
Worst Pair	3,6	3,6	1,2	3,6
PS ACR-N (dB)	7.4	6.9	9.8	12.3
Freq. (MHz)	12.6	12.8	233.5	234.0
Limit (dB)	47.6	47.5	3.3	3.2

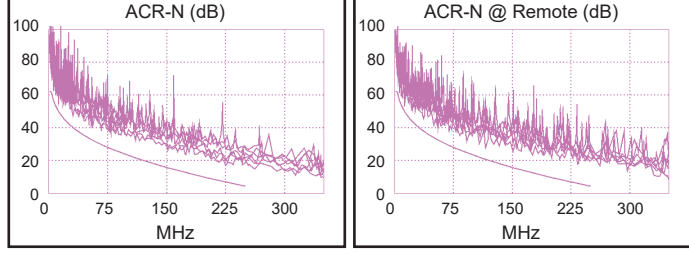

PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5	4,5	4,5	4,5
RL (dB)	6.6	3.9	7.9	7.0
Freq. (MHz)	4.6	4.6	238.0	233.5
Limit (dB)	21.0	21.0	10.2	10.3

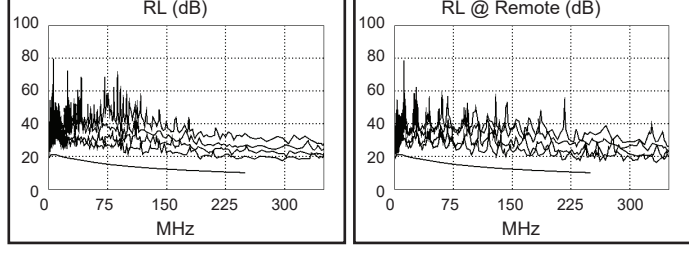

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 2.5GBASE-T 5GBASE-T
 ATM-25 ATM-51 ATM-155
 100VG-AnyLan TR-4 TR-16 Active
 TR-16 Passive

Electrical Characteristics

Frequency MHz	Return Loss Min (dB)	Attenuation Max (dB/100m)	Next (Min dB)
1	20.0	2.1	74.3
4	23.0	3.8	65.3
8	24.5	5.3	60.8
16	25.0	7.5	56.2
20	25.0	8.4	54.8
62.5	21.5	15.0	47.4
100	20.1	19.1	44.3
200	18.0	27.6	39.8
250	17.3	31.1	38.3
300	16.8	34.3	37.1
500	15.2	45.3	33.8
750	14.0	62.3	31.1

Frequency MHz	PSNEXT Min (dB)	ELFEXT Min (dB/100m)	PSELFEXT Min (dB/100m)	Delay Max (ns/100m)
1	72.3	67.8	64.8	570.0
4	63.3	55.8	52.8	552.0
8	58.8	49.7	46.7	546.7
16	54.2	43.7	40.7	543.0
20	52.8	41.8	38.8	542.0
62.5	45.4	31.9	28.9	538.6
100	42.3	27.8	24.8	537.6
200	37.8	21.8	18.8	536.5
250	36.3	19.8	16.8	536.3
300	35.1	18.3	15.3	536.1
500	31.8	13.8	10.8	535.6
750	29.1	10.3	7.3	535.3

1.0-100.0MHz Impedance (ohms) 100 ± 15

1.0-100.0MHz Delay Skew (ns/100m) ≤45

Pair-to-Ground Capacitance Unbalance (pF/100m) ≤3300

Max. Conductor DC Resistance 20oC (ohms/km) 72.2

Resistance Unbalance (%) ≤5

Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	≥13.8
Aging Elongation (%)	≥150
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	≥85% of unaged
Aging Elongation (%)	≥50% of unaged
Cold Bend (-20+2° Cx4hrs)	No Crack

We Ship direct from our high service warehouse.

Returns? No problem.
Guarantee? Of course

The information provided herein is, to the best of our knowledge, true and accurate. Since conditions of use are beyond our control, all information presented is without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.